


100
Network
Figure 1
AUS920000798US1

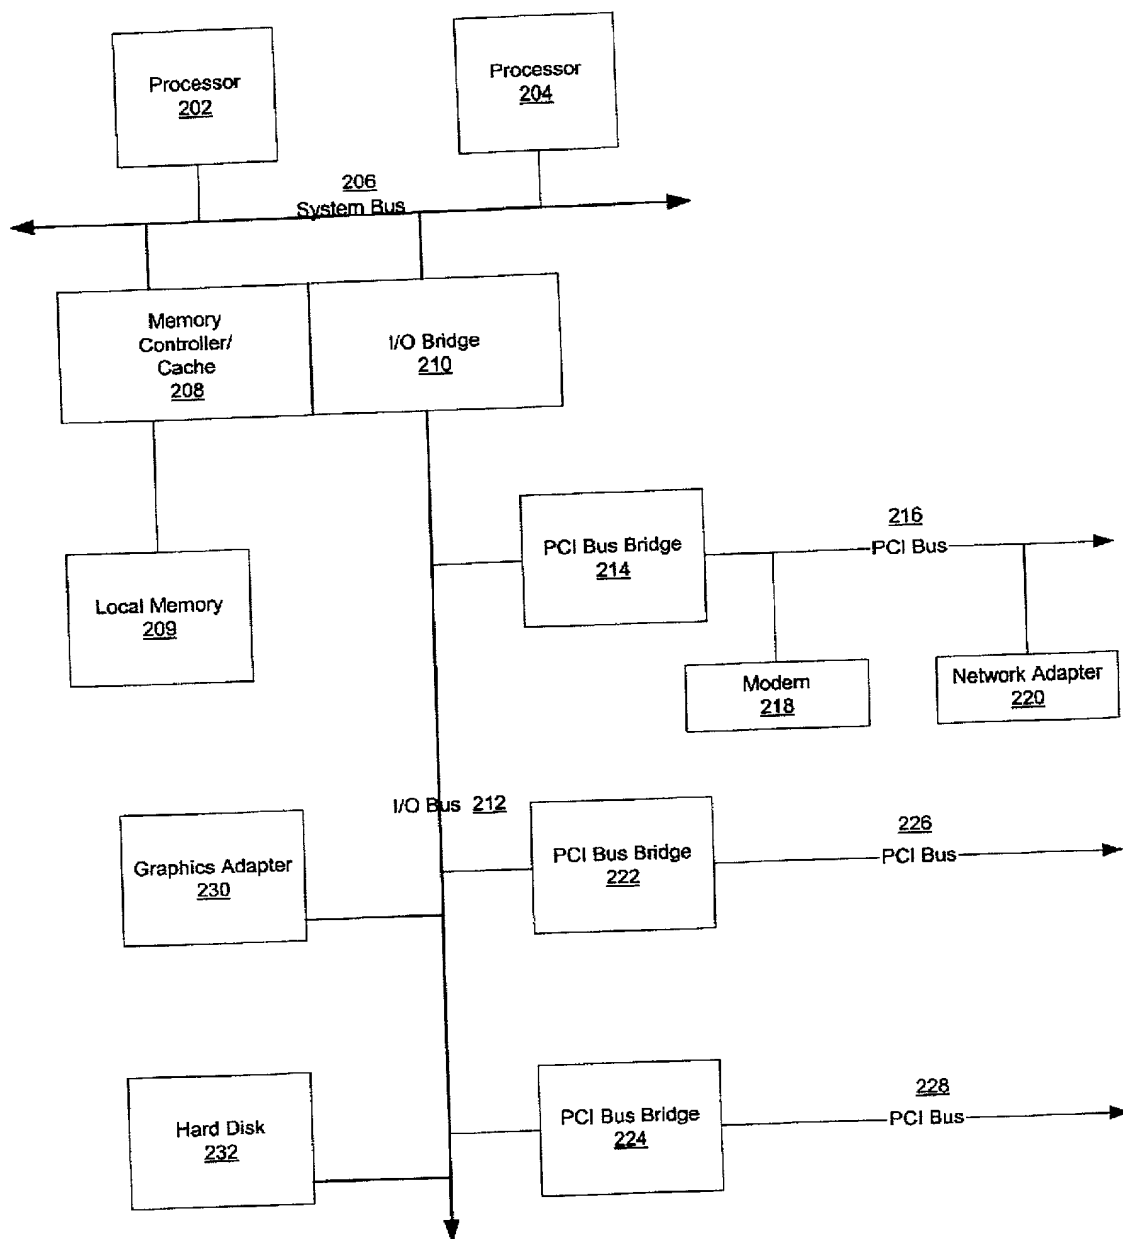


200
Server

Figure 2

AUS920000798US1

Sheet 2 of 9

FIG. 3 is a block diagram of a client system 300. The client system 300 includes a processor 302, a host/PCI cache/bridge 308, main memory 304, and an audio adapter 316. The processor 302, host/PCI cache/bridge 308, and main memory 304 are connected to a bus 306. The audio adapter 316 is also connected to the bus 306. The bus 306 is connected to a SCSI host bus adapter 312, a LAN adapter 310, an expansion bus interface 314, a graphics adapter 318, and an audio/video adapter 319. The SCSI host bus adapter 312 is connected to a disk 326, a tape 328, a CD-ROM 330, and a DVD 332. The expansion bus interface 314 is connected to a keyboard and mouse adapter 320, a modem 322, and memory 324.

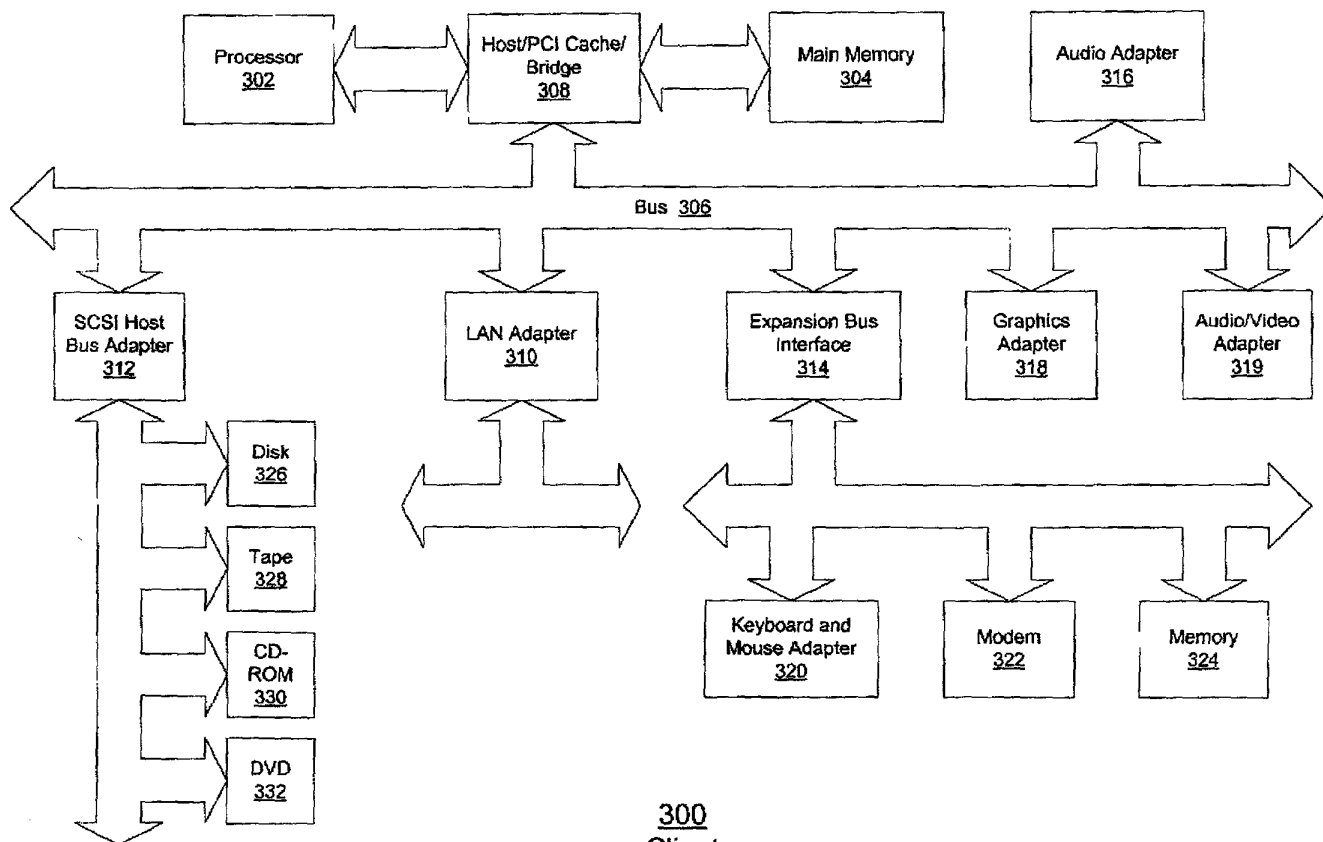

300
Client
Figure 3

AUS920000798US1

Sheet 3 of 9

Add System Policy Record

System Policy Name: 402

Description: 404

Actions: 406

Global Password Policy ← 408

UNIX Password Policy ← 410

NT Password Policy ← 412

GSO Password Policy ← 414

Global Change Password Policy ← 416

☒ Automatically Change Target Passwords 420

☐ Allow User to Change Target Passwords 422

Password Source ← 424

☒ Common ← 426

☐ Random ← 428

☐ User Supplied ← 430

400

Figure 4

AUS920000798US1

Sheet 4 of 9

Figure 5

AUS920000798US1

Sheet 5 of 9

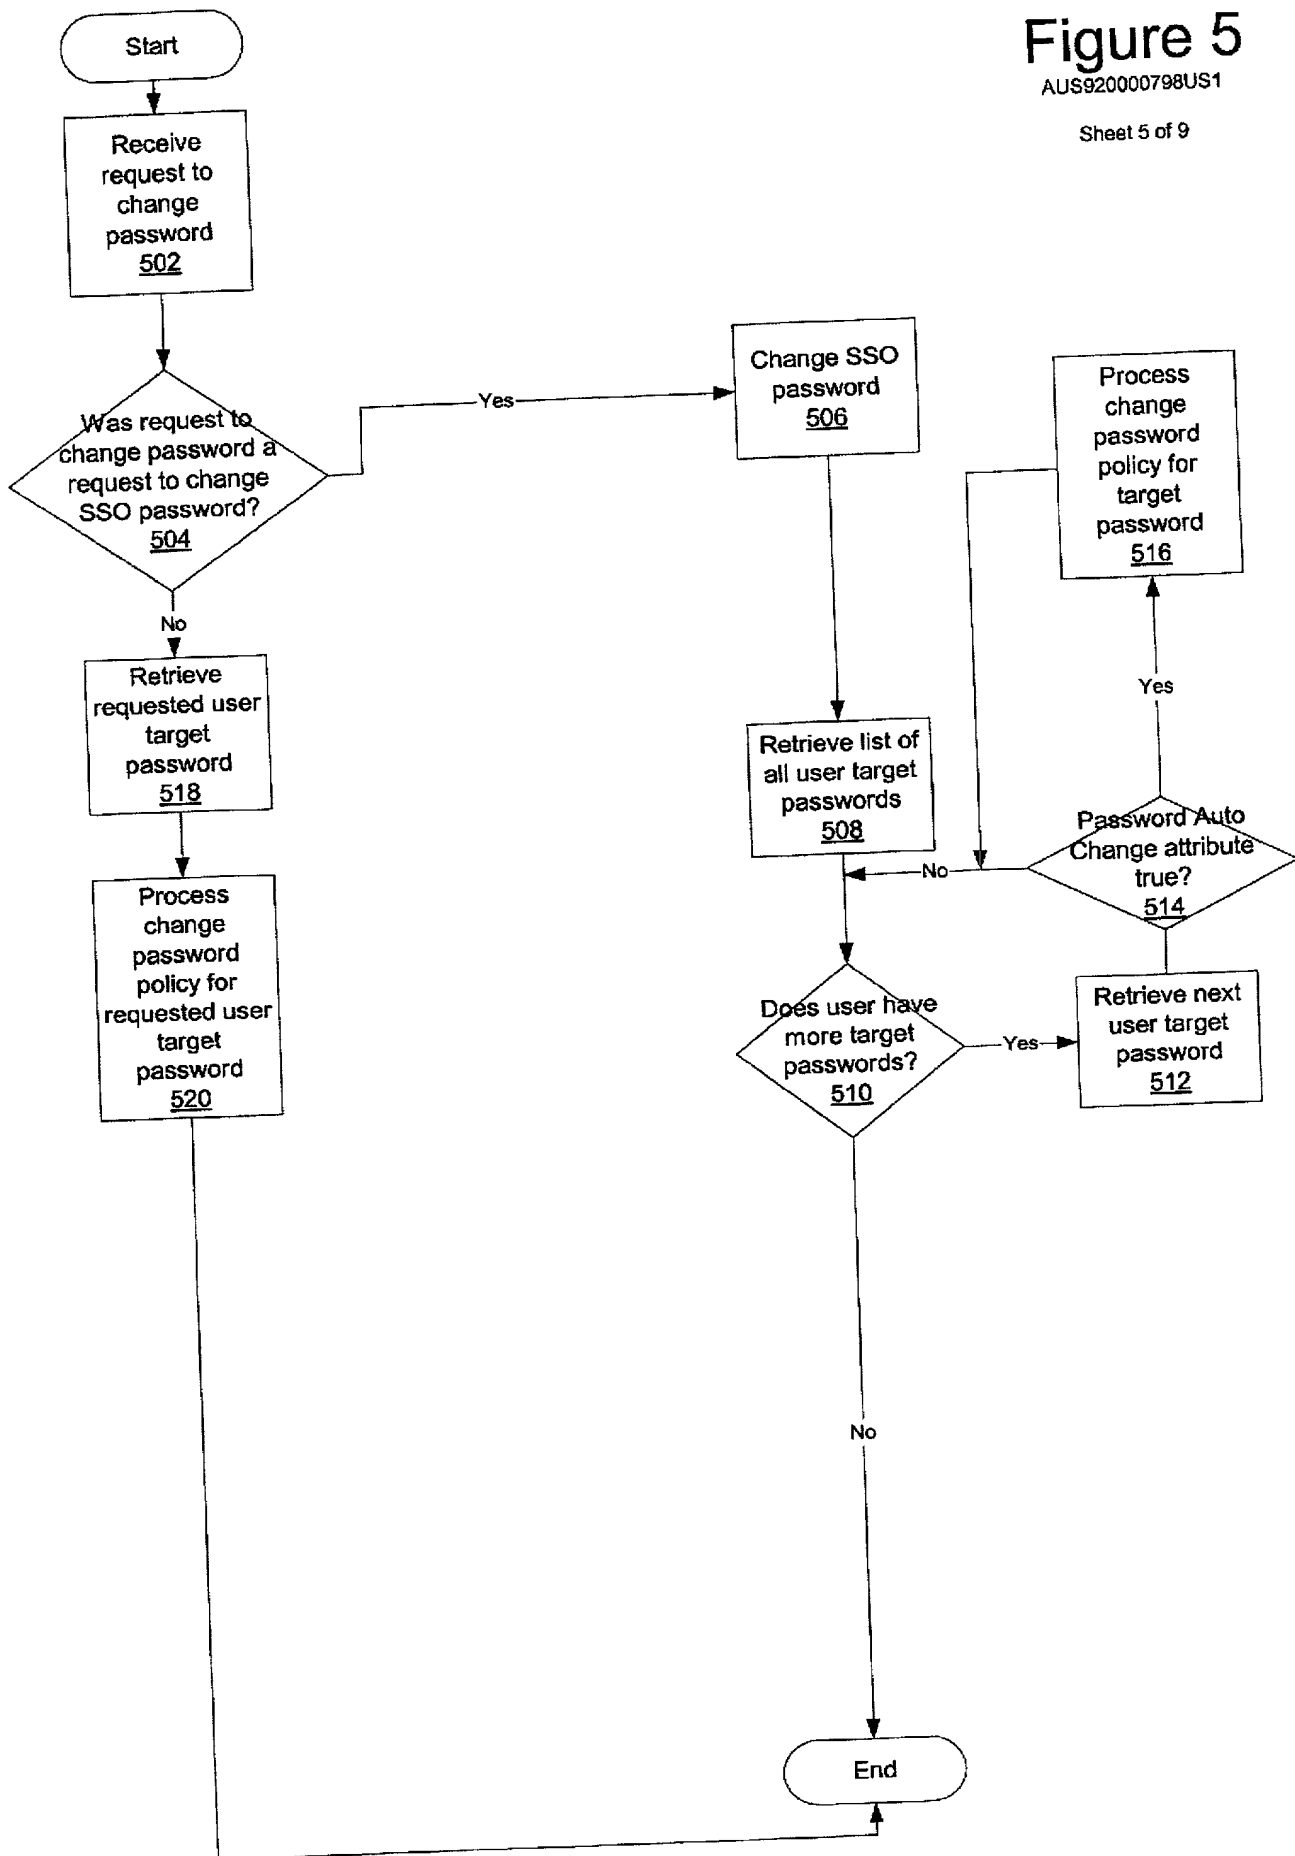


Figure 6

AUS920000798US1

Sheet 6 of 9

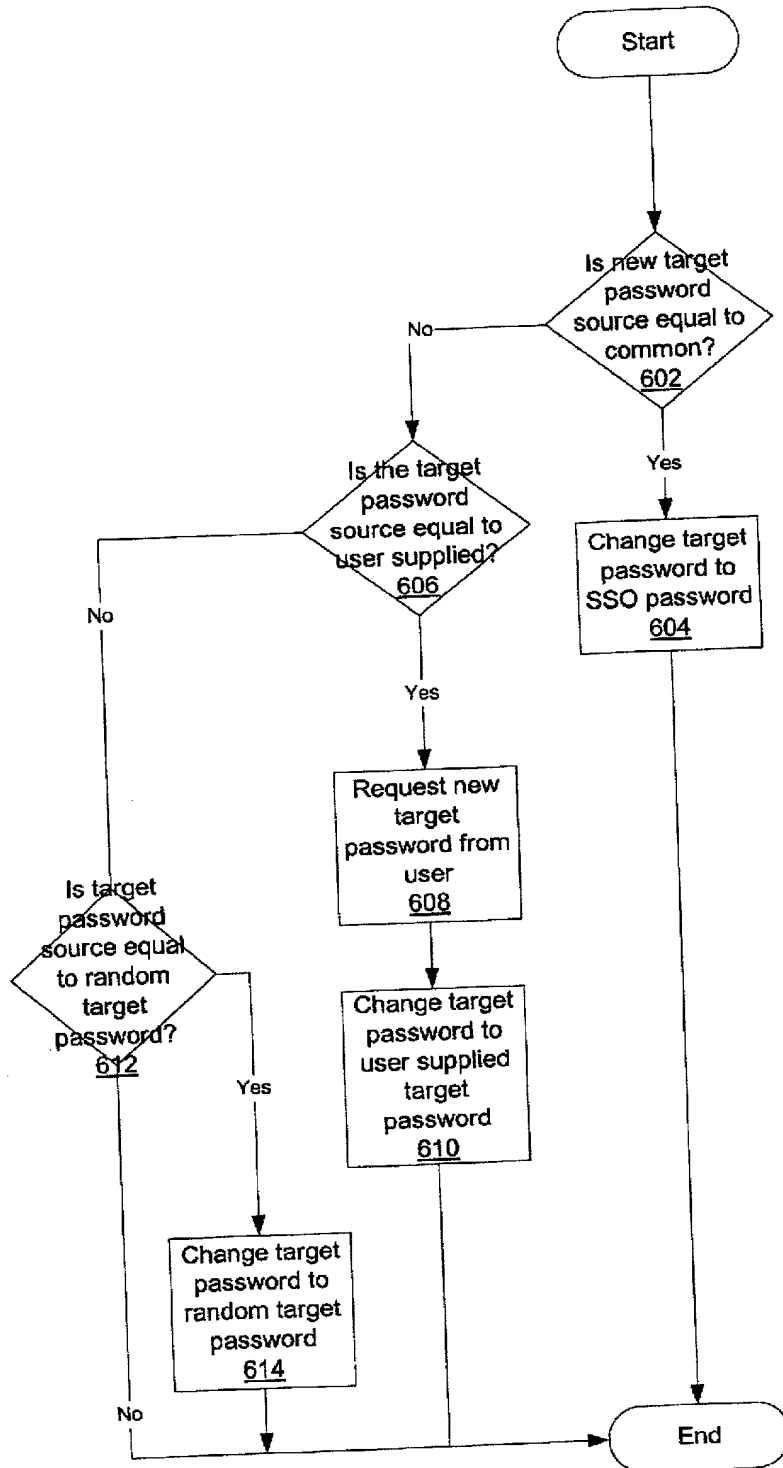


Figure 7
AUS920000798US1

Sheet 7 of 9

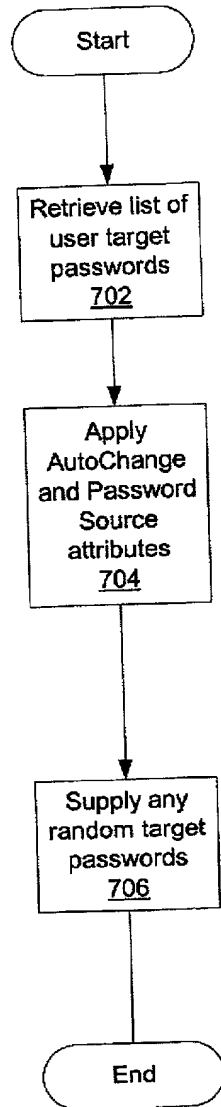


Figure 8

AUS920000798US1

Sheet 8 of 9

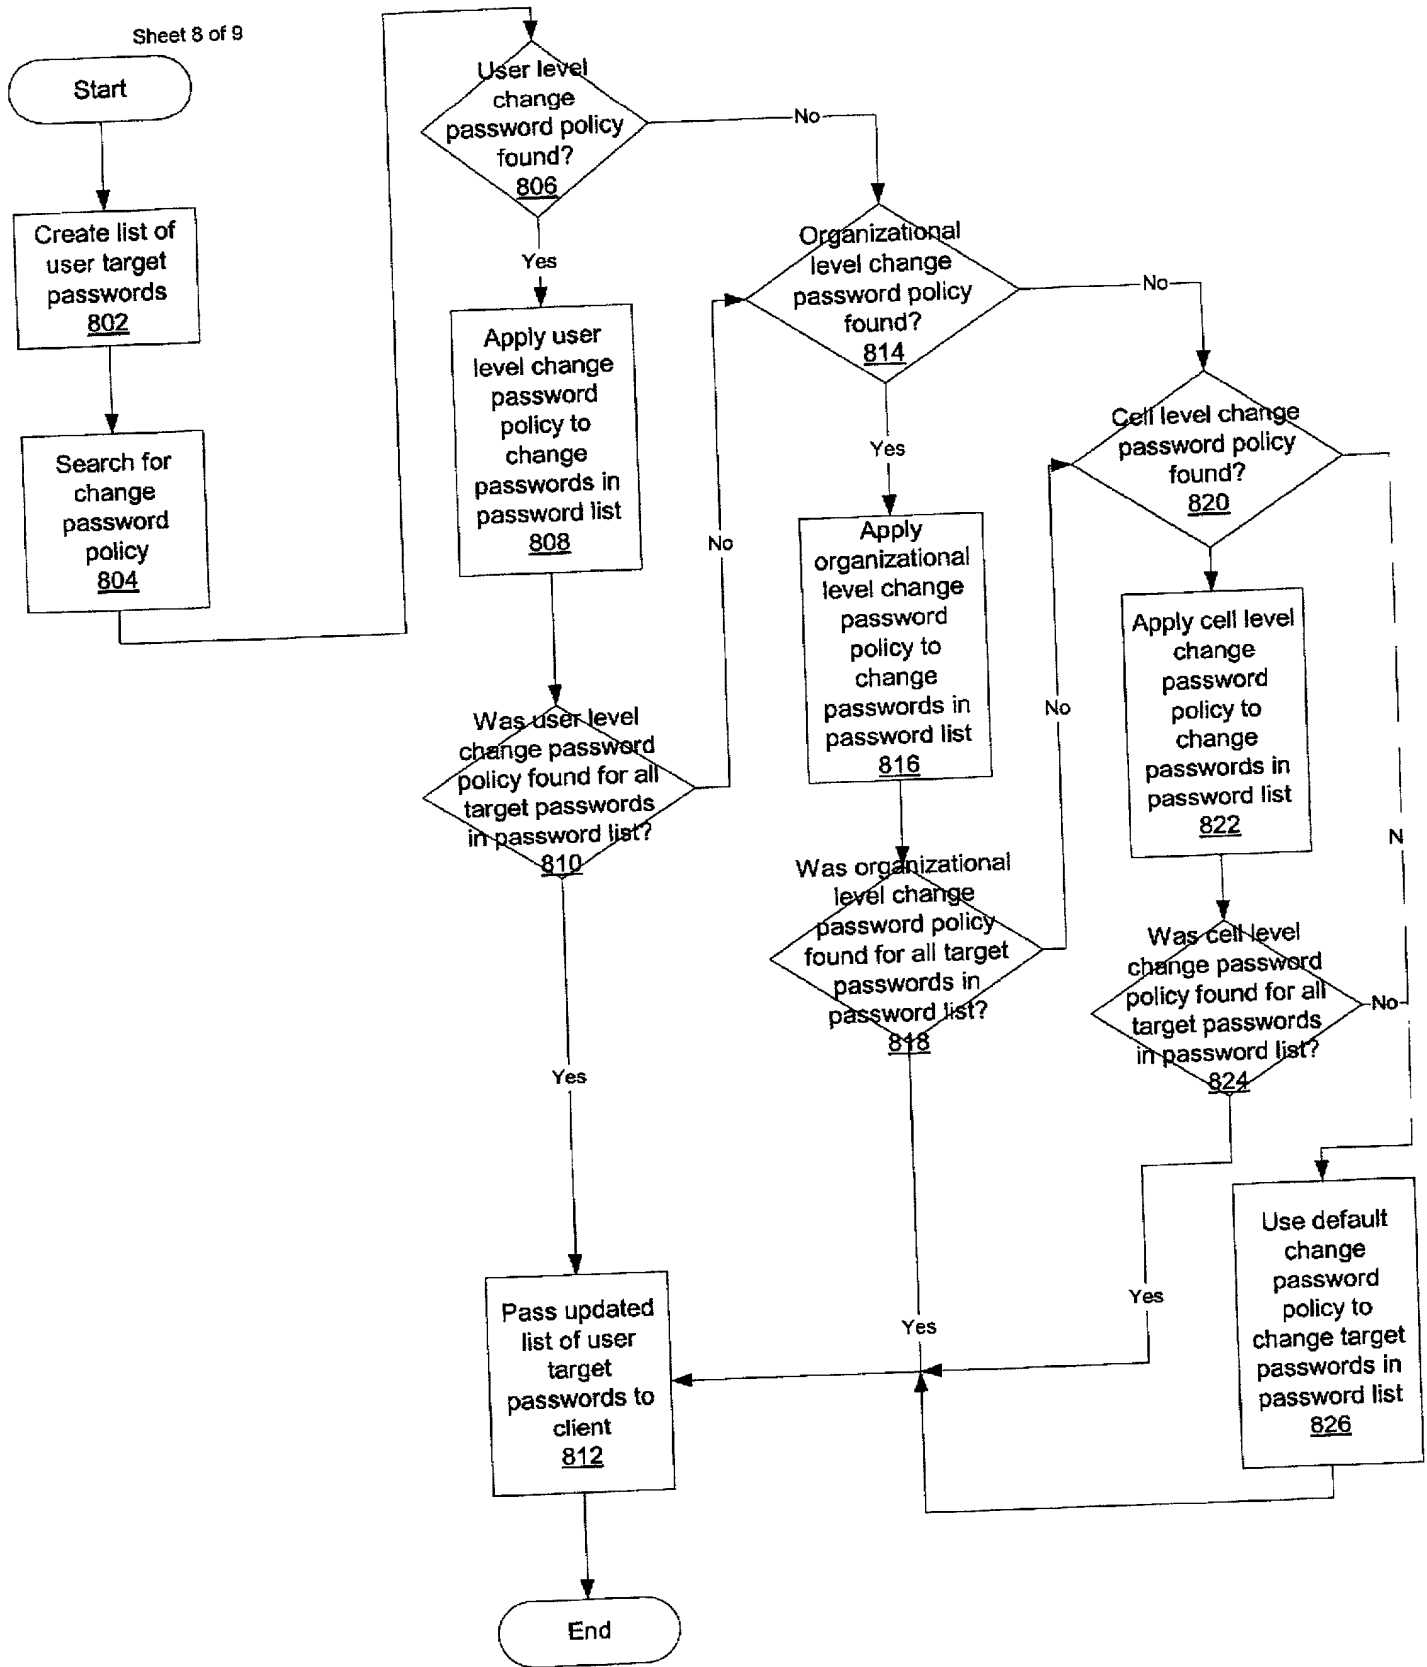


Figure 9

AUS920000798US1

Sheet 9 of 9

